



BACKDROP INSTRUCTIONS


1. Twist off screw counterclockwise from bottom of pin.
2. Thread screw into hole in center of baseplate.
3. Twist pin clockwise back onto screw with baseplate in between. Repeat with second base plate and place them required width apart.
4. Slide 8' uprites over pins with slotted end on top.

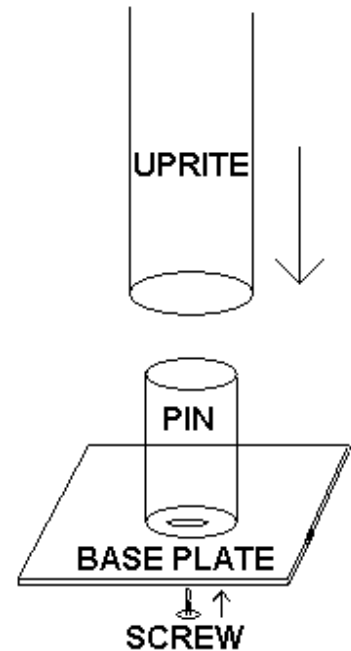

5. Set adjustable drape support rod to desired width. The buttons click in at 8' and 10' width.
6. Thread drapes onto adjustable drape support rod.

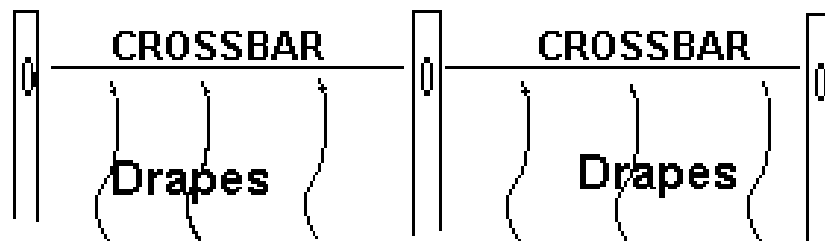

7. Place hook on one end of drape support rod snugly into upright slot.
8. Repeat with other end of drape support rod on second upright.

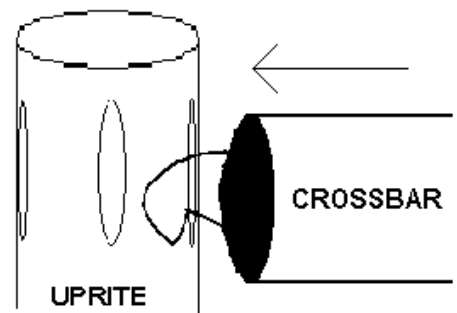

OnlineEEL.com

Event Decorating Products International Store